

| 0 | 0 | 0 |
|-------------|-------|---|
| 8000 | 8000 | 0 |
| 16000 16000 | | 0 |
| 20000 | 20000 | 0 |
| 35220 | 35220 | 0 |
| 48440 | 48440 | 0 |

Repeatability

| 23220 | 23220 | 0 |
|-------|-------|---|
|-------|-------|---|

Notes:

All ok

Engineer Name:

JS






Repeatability

23220 23220 0

| Traceable Weights Used: | | ΗΤυ | | | |
|---|----|-----|----|----|--|
| Trading Standards Maximum | 60 | +/- | 60 | kg | |
| Tolerance: Calibration method and equipment used | | | | | |

Calibration method and equipment u traceable to national standards.

QMF17 Issue 5 14/07/2020

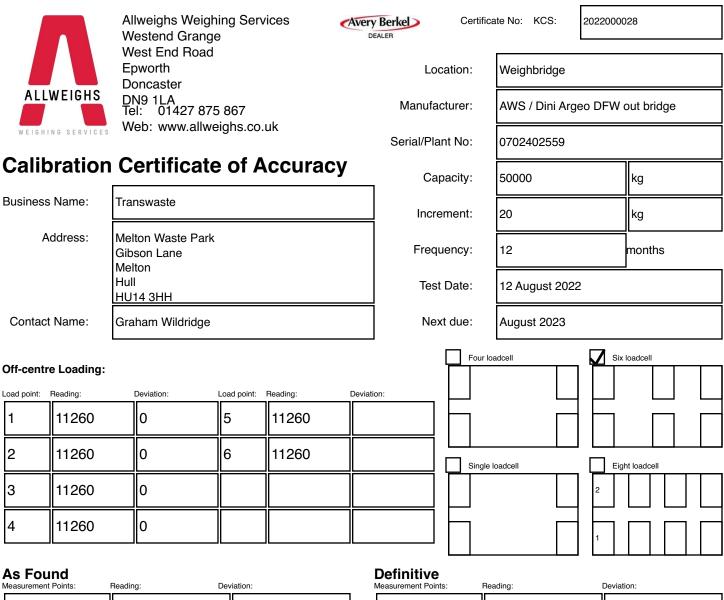

| 0 | 0 | 0 |
|-------|-------|---|
| 8000 | 8000 | 0 |
| 16000 | 16000 | 0 |
| 20000 | 20000 | 0 |
| 35220 | 35220 | 0 |
| 48440 | 48440 | 0 |

Repeatability

| 23220 | 23220 | 0 |
|-------|-------|---|
|-------|-------|---|

Notes:

Engineer Name:



All ok



Repeatability

23220 23220 0

| Traceable Weights Used: | | НΤU | | |
|---------------------------------|----|-----|----|----|
| Trading Standards Maximum | 60 | +/- | 60 | kg |
| Tolerance: | | | | |

Calibration method and equipment u traceable to national standards.

QMF17 Issue 5 14/07/2020